

pearller
one more better

pearller
one more better



2026 Product Catalog

ZHEJIANG HAORYUAN Electronic Technology Co.,LTD.
FRANK AUDIO CO.,LIMITED

Factory Add: No.168 XingHui Bei Road, XiaShe Xin'An Town, DeQing County, HuZhou
City, ZheJiang China. Postcode: 313217

Office Add: Rm-304 2-Block-GreenCity Future Park Wuchang Street YuHang -Hangzhou
City ZheJiang China ZipCode:310000

Tel: (86 571) 88771772 (86 572) 8493790

Email: frank@frankaudio.com.cn

Web: <http://www.pearller.com>

Company Introduction

Welcome to Zhejiang Haoyuan Electronic Technology Co., Ltd., also known as Frank Audio Co., Ltd. For over two decades, we have been a pioneering force in the manufacturing of public address (PA) audio products in China. Our comprehensive portfolio encompasses a wide array of PA equipment, including wall speakers, ceiling speakers, horn speakers, column speakers, PA amplifiers, stereo amplifiers, Bluetooth/Wi-Fi amplifiers, Bluetooth/Wi-Fi active speakers, megaphones, microphones, volume controls, alarm sirens, and more.

At Frank Audio, we pride ourselves on delivering exceptional quality. Our company is ISO and Bureau certified, and our products are backed by CE and RoHS certifications. Our commitment to excellence is further underscored by our highly skilled team of engineers and a dedicated workforce of approximately 100 production employees. We leverage state-of-the-art testing and production equipment to meticulously design, enhance, and ensure the reliability of our products.

Strategically located in Huzhou, Zhejiang Province, our factory enjoys convenient access to the Shanghai and Ningbo ports, facilitating efficient and timely shipping. We actively participate in international exhibitions, such as the Guangzhou Pro Lights and Sound Show, Canton Fair, ISE in Europe, and InfoComm in the US, where we eagerly await the opportunity to connect with you.

For more detailed information about our products, please visit our website or explore our listings on Alibaba and Global Sources B2B platforms. Thank you for choosing Frank Audio—your trusted partner in audio solutions.



CONTENTS

01 | AMPLIFIER

RACK AMPLIFIER	01 - 05
DESKTOP AMPLIFIER	05 - 07
WIRELESS AMPLIFIER	08 - 11

02 | WALL PLAYER

IN-WALL PLAYER	12
----------------	----

03 | WIRELESS BROADCAST SYSTEM

TRANSMITTER	13
SUBWOOFER	13
ACTIVE SPEAKER	14

04 | WALL CONTROLLER

IN-WALL CONTROL PANEL	15
-----------------------	----

05 | SPEAKER

WALL MOUNT SPEAKER	16 - 21
CEILING SPEAKER	22 - 24
HANGING AND PROJECTOR SPEAKER	25
HORN SPEAKER	26 - 27

06 | VOLUME CONTROL

IN-WALL VOLUME CONTROL SELECTOR	28 - 30 31
------------------------------------	---------------

RACK AMPLIFIER

7-Series Amplifier Class AB

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- 4 zones** featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	HY7120MB	HY7240MB	HY7360MB	HY7500MB
Output power	120W	240W	360W	500W
Frequency response	Mic: -3dB (200Hz~18KHz) Line: -3dB (100Hz~19KHz)			
T.H.D. at 1 kHz	< 1%			
Input sensitivity	Mic Input: -40dB(10mV).Line:-8dB(400mV)			
Input interface	MIC1,2,3/Line1:6.35mm/XLR. Line2&3:RCA. USB. SD. Bluetooth.FM radio			
Output interface	8Ohms and 100V. 4-Zones 100V. RMS 1V Low Voltage Signal.			
Signal-to-noise ratio	Mic: > 80 dB Line: > 85 dB			
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 24V DC			
Dimensions WxHxD	484x89x340mm	484x89x390mm	484x89x390mm	484x89x390mm

6-Series Amplifier Class AB

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- 6 zones** featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	HY6120MB	HY6240MB	HY6360MB
Output power	120W	240W	360W
Frequency response	Mic: -3dB (200Hz~18KHz) Line: -3dB (100Hz~19KHz)		
T.H.D. at 1 kHz	< 1%		
Input sensitivity	Mic Input: -40dB(10mV).Line:-8dB(400mV)		
Input interface	MIC1,2,3/Line1:6.35mm/XLR. Line2&3:RCA. USB. SD. Bluetooth.FM radio		
Output interface	8Ohms and 100V. 4-Zones 100V. RMS1V Low Voltage Signal.		
Signal-to-noise ratio	Mic: > 80 dB Line: > 85 dB		
Power supply	100-120V AC/60Hz or 230-240V AC/50Hz		
Dimensions WxHxD	484x89x340mm	484x89x390mm	484x89x390mm

RACK AMPLIFIER

3-Series Matrix Amplifier Class D


- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- 6/4/2 zones** featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	HY3066	HY3124	HY3242
Output power	6x60W	4x120W	2x240W
Frequency response	60Hz~20kHz		
T.H.D. at 1 kHz	< 0.75%		
Input sensitivity	Mic: -50dB,600 ohms. Line: -10dB,10k ohms.		
Input interface	MIC/Line1: XLR/6.3mm. MIC/Line2: XLR/6.3mm. MIC/Line3: XLR/6.3mm. Aux:2xRCA		
Output interface	Monitor: 2xRCA. Zone1-6: 6xRCA. Speaker: 100V/8 ohms/4 ohms/COM		
Signal-to-noise ratio	>90 dB		
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 48V DC		
Dimensions WxHxD	383x89x482mm		

The Matrix Amplifier System

- A powerful and flexible solution for **managing audio distribution across multiple zones**
- Includes a **Matrix Amplifier**, a **Paging Microphone (PM108)** with zone selection capabilities, and a **In-Wall Control Panel (WP86 Series)** for managing a specific zone
- Connected through RJ45 ethernet cable that supports **PoE**

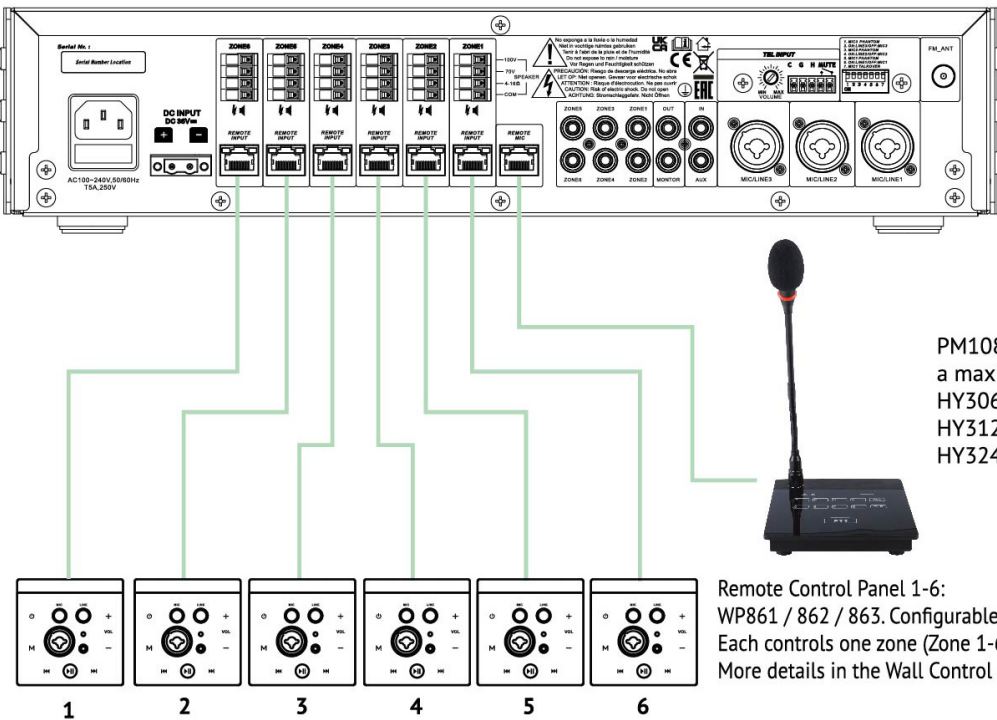

PM108 microphone supports a maximum of 8 zones.
HY3066 supports 6 zones.
HY3124 supports 4 zones.
HY3240 supports 2 zones.

Remote Control Panel 1-6:
WP861 / 862 / 863. Configurable as desired.
Each controls one zone (Zone 1-6).
More details in the Wall Control Panel section.

RACK AMPLIFIER

5MB-Series Amplifier Class D

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- 6 zones** featuring multiple outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	HY5180MB	HY5240MB	HY5360MB	HY5500MB
Output power	180W	240W	360W	500W
Frequency response	Mic: (200Hz~18KHz) Line: (100Hz~19KHz)			
T.H.D. at 1 kHz	< 0.5%			
Input sensitivity	Mic Input: -40dB(10mV).Line:-8dB(400mV)			
Input interface	Mic1&2:6.35mm. Mic3/Line1:XLR/6.35mm.Line2&3:RCA.			
Output interface	4~16 ohms,70V,100V, RMS 1V low voltage signal			
Signal-to-noise ratio	Mic: > 80 dB Line: > 85 dB			
Power supply	100-120V AC/60Hz or 230-240V AC/50Hz			
Dimensions WxHxD	484x89x375mm			

2-Series Amplifier Class AB

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- Featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	HY2120MB	HY2240MB
Output power	120W	240W
Frequency response	80Hz~18kHz	
T.H.D. at 1 kHz	< 0.5%	
Input sensitivity	Mic:-50dB,600 ohms. Line:-10dB,10k ohms.	
Input interface	MIC1/Line1:6.35mm/XLR jack combo. MIC2:6.3mm jack. Line2/Line3:2xRCA	
Output interface	Speaker: 4/8 ohms/70V/100V, Line output: RCA 0dB, 600 ohms	
Signal-to-noise ratio	>90 dB	
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 24V DC	
Dimensions WxHxD	350x89x482mm	

RACK AMPLIFIER

FA 1-Series Amplifier Class AB

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- 5 zones** featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	FA1080	FA1120	FA1180
Output power	80W	120W	180W
Frequency response	40Hz~18kHz ± 0.5dB		
T.H.D. at 1 kHz	≤ 0.2%		
Input sensitivity	Input MIC1/2: 3mV; Input AUX1/2: 180mV		
Output interface	4-16Ω, 70V, 100V; 5 zones 100V; 0dB low voltage signal		
Signal-to-noise ratio	Mic: > 80dB, Line > 85dB		
Power supply	110 - 120VAC/60Hz or 220 - 240VAC/50Hz		
Dimensions WxHxD	484x66x295mm		

FA 2-Series Amplifier Class AB

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- 5 zones** featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	FA2180	FA2250	FA2350
Output power	180W	250W	350W
Frequency response	40Hz~18kHz ± 0.5dB		
T.H.D. at 1 kHz	≤ 0.2%		
Input sensitivity	Input MIC1/2: 3mV; Input AUX1/2: 180mV		
Output interface	4-16Ω, 70V, 100V; 5 zones 100V; 0dB low voltage signal		
Signal-to-noise ratio	Mic: > 80dB, Line > 85dB		
Power supply	110 - 120VAC/60Hz or 220 - 240VAC/50Hz		
Dimensions WxHxD	480x89x310mm		

RACK AMPLIFIER

D-Series Amplifier Class D

- Designed and engineered for **professional audio and sound applications**
- Delivering high-quality audio signals to speakers
- Fit into standardized rack units
- **6 zones** featuring multiple inputs and outputs
- Built-in MP3 player with display screen (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	PAD180	PAD240	PAD360	PAD500
Output power	180W	240W	360W	500W
Frequency response	Mic: (200Hz~18KHz) Line: (100Hz~19KHz)			
T.H.D. at 1 kHz	< 0.5%			
Input sensitivity	Mic Input: -40dB(10mV).Line:-8dB(400mV)			
Input interface	Mic:6.35mm. Mic2/Line3:XLR/6.35mm.Line1&2:RCA.			
Output interface	4~6 ohms,70V,100V,6-zones 100V, RMS 1V low voltage signal			
Signal-to-noise ratio	Mic: > 80 dB Line: > 85 dB			
Power supply	100-120V AC/60Hz or 230-240V AC/50Hz			
Dimensions WxHxD	484x89x340mm			

PA302MBT Amplifier

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Featuring multiple inputs and outputs
- Built-in MP3 player (Bluetooth, USB and TF Card)
- IR remote control



Technical data	PA302MBT
Output power	15W+15W
Frequency response	Mic: 100Hz~20kHz; Line: 30Hz~20kHz
T.H.D. at 1 kHz	< 1%
Input sensitivity	Input 1, 2 Mic: 5mV; Input 3 Aux: 245mV
Output interface	4,8 ohms
Signal-to-noise ratio	Mic: >70 dB Line: >90 dB
Power supply	Main: 100-240V AC/50-60Hz. Auxiliary: 12V DC
Dimensions WxHxD	150x52x190mm

DESKTOP AMPLIFIER

DPA-Series Amplifier

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Featuring multiple inputs and outputs
- Built-in MP3 player (USB, SD Card and AUX)
- IR remote control



Technical data	DPA30MBT	DPA50MBT	DPA1502MBT	DPA3002MBT
Output power	30W(70V/100V)	50W(70V/100V)	15W+15W, 8 ohms	30W+30W, 8 ohms
Frequency response	Mic: 100Hz~20kHz. Line: 30Hz~20kHz.			
T.H.D. at 1 kHz	< 1%			
Input sensitivity	Mic 1&2: 5 mV. Line 1: 140 mV. Line 2: 250 mV			
Signal-to-noise ratio	Line: >90 dB			
Power supply	Main: 100-240V AC/50-60Hz. Auxiliary: 12V DC			
Dimensions WxHxD	220x65x220mm			

1-Series Amplifier

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Featuring multiple inputs and outputs
- Built-in MP3 player (Bluetooth, USB, AUX, radio and SD Card)
- IR remote control



Technical data	HY1060MBT	HY1120MBT
Output power	60W(RMS)	120W(RMS)
Frequency response	Mic: 200Hz~18kHz Line: 100Hz~18kHz	
T.H.D. at 1 kHz	< 1%	
Input sensitivity	Input 1, 2 Mic: 5mV; Input 3 Aux: 245mV	
Output interface	4,8 ohms; 70V, 100V, RMS 1V low voltage signal	
Signal-to-noise ratio	Mic: >70 dB Line: >80 dB	
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 24V DC	
Dimensions WxHxD	360x90x290mm	

1Z-Series Amplifier

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- **2 zones** featuring multiple inputs and outputs
- Built-in MP3 player (Bluetooth, USB, AUX, radio and SD Card)
- IR remote control



Technical data	HY1060MBT-Z	HY1120MBT-Z
Output power	60W(RMS)	120W(RMS)
Frequency response	Mic: 200Hz~18kHz Line: 100Hz~18kHz	
T.H.D. at 1 kHz	< 1%	
Input sensitivity	Input 1, 2 Mic: 5mV; Input 3 Aux: 245mV	
Output interface	4,8 ohms; 70V, 100V, RMS 1V low voltage signal	
Signal-to-noise ratio	Mic: >70 dB Line: >80 dB	
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 24V DC	
Dimensions WxHxD	360x90x290mm	

DESKTOP AMPLIFIER

PA-30M/60M Amplifier

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Featuring multiple inputs and outputs
- Built-in MP3 player (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	PA-30M	PA-60M
Output power	30W	60W
Frequency response	Mic: 100Hz~20kHz Line: 20Hz~20kHz	
T.H.D. at 1 kHz	< 1%	
Input sensitivity	Input 1, 2 Mic: 5mV; Input 3 Aux: 400mV	
Output interface	4,8 ohms; 70V, 100V	
Signal-to-noise ratio	Mic: >70 dB Line: >80 dB	
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 24V DC	
Dimensions WxHxD	325x85x220mm	

PA-30MZ/60MZ Amplifier

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- **2 zones** featuring multiple inputs and outputs
- Built-in MP3 player (Bluetooth, radio, USB and SD Card)
- IR remote control
- Built-in overcurrent protection, overload protection, short circuit protection, over temperature protection



Technical data	PA-30MZ	PA-60MZ
Output power	30W	60W
Frequency response	Mic: 100Hz~20kHz Line: 20Hz~20kHz	
T.H.D. at 1 kHz	< 1%	
Input sensitivity	Input 1, 2 Mic: 5mV; Input 3 Aux: 400mV	
Output interface	4,8 ohms; 70V, 100V	
Signal-to-noise ratio	Mic: >70 dB Line: >80 dB	
Power supply	Main: 100-120V AC/60Hz or 230-240V AC/50Hz. Auxiliary: 24V DC	
Dimensions WxHxD	325x85x220mm	

WIRELESS AMPLIFIER

MP30W

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- IR remote control
- Connectivity through **Wifi and Bluetooth**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	MP30W
Output interface	RCA stereo
Operating voltage	12V/1A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, Bluetooth, USB, AUX, IR remote control
Dimensions WxHxD	74x30x135mm

MPA30W

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Drives 4pcs passive speakers
- IR remote control
- Connectivity through **Wifi and Bluetooth**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	MPA30W
Output power	30W+30W
Recommended Speaker Impedance	4-8 ohms per output
Operating voltage	19V/3.15A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, Bluetooth, USB, AUX, IR remote control
Dimensions WxHxD	74x30x135mm

WIRELESS AMPLIFIER

MPA60W

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Drives 4pcs passive speakers
- IR remote control
- Connectivity through **Wifi and Bluetooth**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	MPA60W
Output power	60W+60W
Recommended Speaker Impedance	4-8 ohms per output
Operating voltage	26V/3.5A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, Bluetooth, USB, AUX, IR remote control
Dimensions WxHxD	90x42x163mm

DA602WA

- Designed and engineered for **personal or near-field audio and sound applications**
- Delivering high-quality audio signals to speakers
- Compact size and portability
- Built-in MP3 player featuring multiple inputs and outputs
- Connectivity through **Wifi and Bluetooth**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	DA602WA
Output power	30W+30W
Recommended Speaker Impedance	8 ohms per output
Operating voltage	19V/3.15A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, Bluetooth, USB, AUX, IR remote control
Dimensions WxHxD	185x40x157.2mm

WIRELESS AMPLIFIER

HYC1502B

- Designed and engineered for **personal or near-field audio and sound applications**
- Compact size and portability
- Drives one pair of 8 ohms stereo speakers
- Connectivity through **Bluetooth**
- Up to 35 meters receiving range



Technical data	HYC1502B
Output power	15W x 2 Stereo
Recommended Speaker Impedance	8 ohms per output
Operating voltage	15V/2A DC Adapter (included)
Frequency response	20Hz~20kHz
Bluetooth transmitting range	35m
Dimensions WxHxD	85x45x23mm

HYC1503W

- Designed and engineered for **personal or near-field audio and sound applications**
- Compact size and portability
- Connectivity through **Wifi**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	HYC1503W
Output interface	3.5mm AUX stereo
Operating voltage	5V DC micro USB (adapter not included)
Frequency response	20Hz~20kHz
Function	Wifi, USB, AUX, TF card
Dimensions WxHxD	74x74x21mm

HYC1503WA

- Designed and engineered for **personal or near-field audio and sound applications**
- Compact size and portability
- Drives two pairs of 8 ohms stereo speakers
- Connectivity through **Wifi**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	HYC1503WA
Output power	15W x 2 Stereo
Recommended Speaker Impedance	8 ohms per output
Operating voltage	15V/2A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, USB, AUX, TF card
Dimensions WxHxD	74x74x21mm

WIRELESS AMPLIFIER

HYC1505WA

- Designed and engineered for **personal or near-field audio and sound applications**
- Compact size and portability
- Drives two pairs of 8 ohms stereo speakers
- Connectivity through **Wifi or Ethernet Cable**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	HYC1505WA
Output power	15W x 2 Stereo
Recommended Speaker Impedance	8 ohms per output
Operating voltage	15V/2A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, USB, AUX, TF card, RJ45
Dimensions WxHxD	86x86x23mm

HYC1504B

- Designed and engineered for **personal or near-field audio and sound applications**
- Compact size and portability
- IR remote control
- Drives two pairs of 8 ohms stereo speakers
- Connectivity through **Bluetooth**
- Up to 35 meters receiving range
- USB play and TF card play



Technical data	HYC1504B
Output power	15W x 2 Stereo
Recommended Speaker Impedance	8 ohms
Operating voltage	100-240V AC, 50/60Hz
Frequency response	20Hz~20kHz
Bluetooth transmitting range	35m
Dimensions WxHxD	87x87x31mm

HYC3004B

- Designed and engineered for **personal or near-field audio and sound applications**
- Compact size and portability
- IR remote control
- Drives two pairs of 4 ohms stereo speakers
- Connectivity through **Bluetooth**
- Up to 35 meters receiving range



Technical data	HYC3004B
Output power	30W x 2 Stereo
Recommended Speaker Impedance	4 ohms
Operating voltage	15V/2A DC Adapter (included)
Frequency response	20Hz~20kHz
Bluetooth transmitting range	35m
Dimensions WxHxD	87x87x31mm

WALL PLAYER

HYC8601B

- Designed and engineered for **personal or near-field audio and sound applications**
- In-wall media player**
- Display screen
- Touch buttons
- IR remote control
- Connectivity through **Bluetooth**
- Support TF card



Technical data	HYC8601B
Output power	2x10W
Output impedance	8 ohms
Operating voltage	100-240V AC, 50/60Hz
Frequency response	20Hz~20kHz
THD	< 1%
Infrared remote control range	<10m
Dimensions WxHxD	86x86x53mm


HYC8602B

- Designed and engineered for **personal or near-field audio and sound applications**
- In-wall media player**
- Touch buttons
- IR remote control
- Connectivity through **Bluetooth**
- Support TF card




Technical data	HYC8602B
Output power	2x10W
Output impedance	8 ohms
Operating voltage	100-240V AC, 50/60Hz
Frequency response	20Hz~20kHz
THD	< 1%
Infrared remote control range	<10m
Dimensions WxHxD	86x86x53mm

Wall Player Connection Diagram

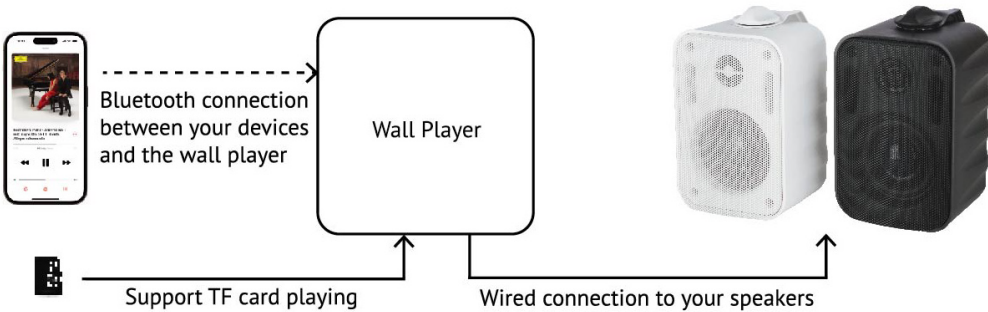

WIRELESS BORADCAST SYSTEM

How the System Works

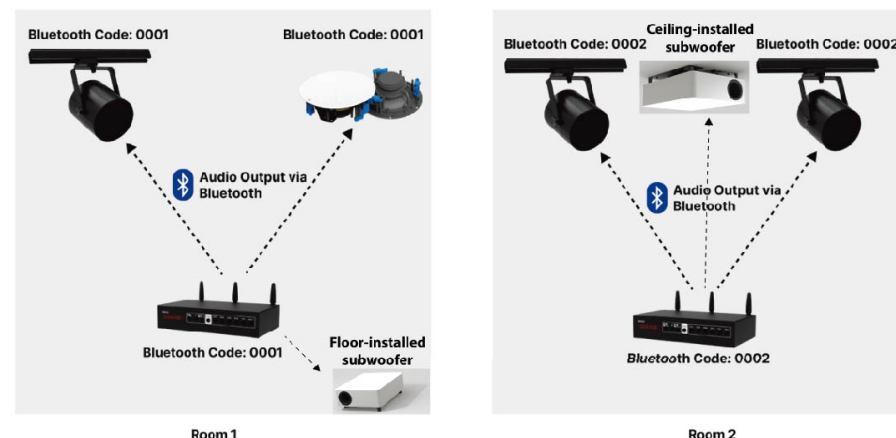

To pair up the transmitter and the speakers, simply adjust their BT code to the same set of numbers (e.g. transmitter and speakers all have a code of 00010)
If multiple systems are set up within a close range (e.g. different rooms/shops), simply adjust the BT code to a different set of numbers as it shown in the images above.
Please note: the optional **subwoofer** HSB101 can be installed **either on floor or on ceiling**.

MPW01W


- Designed and engineered for **personal or near-field audio and sound applications**
- Send signal to speakers in the system as a transmitter
- Compact size and portability
- Built-in MP3 player featuring multiple inputs and outputs
- Connectivity through **Wifi** and **Bluetooth**
- Compatible with mobile apps for wireless stream and control via Wifi



Technical data	MPW01W
Power consumption	2.5W
Power supply	12V/1A DC Adapter (included)
Frequency response	20Hz~20kHz
Function	Wifi, Bluetooth, USB, AUX, IR remote control
Dimensions WxHxD	185x40x157.2mm

HSB101

- Subwoofer speaker for background music application
- Wall or floor installation
- Built-in 2.4GHz Bluetooth receiver (only receive bass signal)
- 4-bit addressing dip switch (wireless system channel switching)

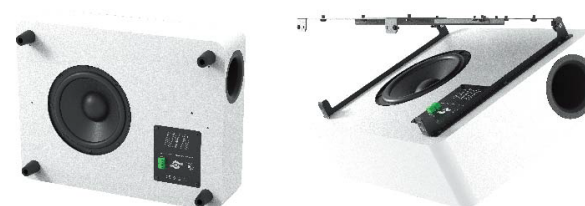

Technical data	HSB101
Woofer	8"
RMS power	120W
Impedance	120 W RMS @ 100 V (83 Ω), 85 W RMS @ 70 V (57 Ω), 60 W RMS @ 100 V/70 V (166 Ω/83 Ω), 30 W RMS @ 100 V/70V (333 Ω/166 Ω), 15 W RMS @ 100 V/70 V (666 Ω/333 Ω), 7.5 W RMS @ 70 V (666 Ω), Low Z: 6 Ω
Frequency response	90Hz~20kHz
Sensitivity (1W/1m)	85dB
Pressure	103dB
Color	white (RAL9003) or black (RAL9005)
Dimensions	545x150x337mm depth

WIRELESS BORADCAST SYSTEM

Options of Active Speakers

- Built-in 2.4GHz Bluetooth receiver
- Wireless full CD audio quality
- No interference or delays
- 4-bit addressing dip switch (wireless system channel switching)
- 20-30m receiving range (depending on conditions)

HYB150-5BST



- Wall mounted active speaker

Technical data	HSR150-5BST
Tweeter	0.5"
Woofer	5"
RMS power	2x15W
Frequency response	80Hz~20kHz
Sensitivity (1W/1m)	90dB
Broadcast receive sensitivity	-95dB
Power supply	100-240V AC/50-60Hz
Dimensions WxHxD	139x205x115mm

HYB159-BST



- Active speaker
- Suitable for aluminum lighting track system

Technical data	HSR159-5BST
Woofer	2.5"
RMS power	6W
Frequency response	90Hz~20kHz
Sensitivity (1W/1m)	90dB
Broadcast receive sensitivity	-95dB
Power supply	100-240V AC/50-60Hz
Dimensions WxHxD	84x84x165mm

HSR186-6BST



- Active ceiling speaker

Technical data	HSR186-6BST
Tweeter	0.5"
Woofer	6.5"
RMS power	2x15W
Frequency response	90Hz~20kHz
Sensitivity (1W/1m)	90dB
Broadcast receive sensitivity	-95dB
Power supply	15V/2A DC
Dimensions WxHxD	212.8x212.8x86.3mm

HSR318-5BST



- Active speaker
- Suitable for aluminum lighting track system

Technical data	HSR318-5BST
Tweeter	0.5"
Woofer	5"
RMS power	15W
Frequency response	90Hz~20kHz
Sensitivity (1W/1m)	90dB
Broadcast receive sensitivity	-95dB
Power supply	100-250V AC/50-60Hz
Dimensions WxHxD	136x136x157.2mm

WALL CONTROLLER

WP861-MAC




WP862-MAC



WP863-MA



Rear Panel View

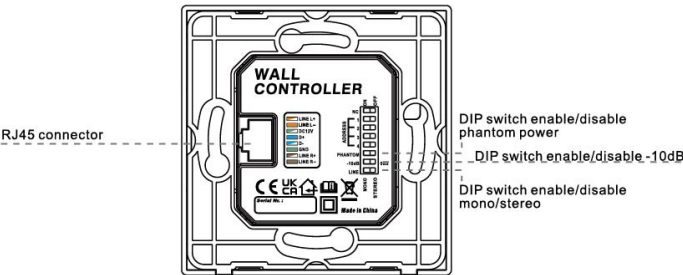


Highlighted Features

- Designed and engineered for more convinient audio experience
- Source selection
- Volume control
- Audio track selection
- Bluetooth connection
- User-friendly interface that shows intuitive operations on panels


Wall Control System

The system works with:

- Compatible with active speakers (e.g. HYB106-5AC/6AC).

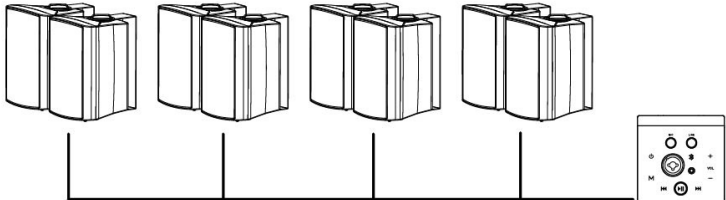

- Compatible with amplifiers (3 Series Matrix Amplifiers).

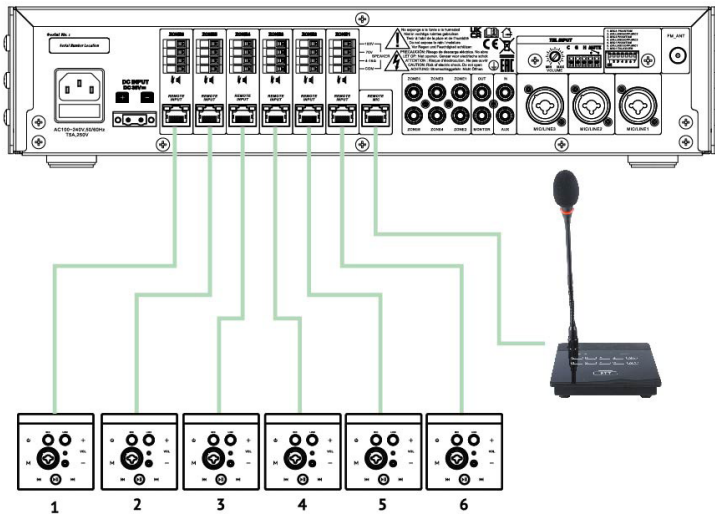

WALL MOUNT SPEAKER

HYB103 Series

- **Passive speaker**
- With transformer
- Exceptional audio performance
- Easy and flexible installation



Technical data	HYB103-4T	HYB103-5T	HYB103-6T
Load rating	20 W	30 W	40 W
Transformer tappings	20W-10W-5W(100V)	30-15-7.5W(100V)	40W-20W-10W(100V)
Frequency range	150Hz-20KHz	100Hz-20KHz	90Hz-20KHz
SPL (@1W/m)	86dB	87dB	88dB
Woofers and Impedance	4"	5 1/4"	6 1/2"
Tweeter and Impedance	1/2"	1/2"	1"
Dimension HxWxD(mm)	198x151x127mm	240x179x153mm	288x216x180mm
Color	white (RAL9003) or black (RAL9005)	white (RAL9003) or black (RAL9005)	white (RAL9003) or black (RAL9005)

HYB125 Series

- **Passive speaker**
- With transformer
- Exceptional audio performance
- Easy and flexible installation



Technical data	HYB125-4T	HYB125-5T	HYB125-6T	HYB125-8T
Load rating	20 W	30 W	40 W	50 W
Transformer tappings	20W-10W-5W(100V) 20W-10W-5W-2.5W(70V)	30-15-7.5W(100V) 30-15-7.5-3.75W(70V)	40W-20W-10W(100V) 40W-20W-10W-5W(70V)	50W-25W-12.5W(100V) 50W-25W-12.5W-6.25W(70V)
Frequency range	100Hz-20KHz	90Hz-20KHz	70Hz-20KHz	60Hz-20KHz
SPL (@1W/m)	87dB	89dB	91dB	93 dB
Woofers and Impedance	4"PP/8 ohms	5 1/4"PP/8 ohms	6 1/2"PP /8 ohms	8"PP /8 ohms
Tweeter and Impedance	1/2" mylar/8 ohms	1/2" mylar /8 ohms	1" silk dome /8 ohms	1" silk dome /8 ohms
Dimension HxWxD(mm)	216x148x132mm	255x179x156mm	308x213x191mm	412x289x257mm
Material, color	PP ,white or black	PP ,white or black	PP ,white or black	PP ,white or black

WALL MOUNT SPEAKER

HYB106-5AB/6AB


- **Active speaker**
- Exceptional audio performance
- Easy and flexible installation
- Designed for both residential and commercial use
- Support high quality balanced inputs



Technical data	HYB106-5AB	HYB106-6AB
Loading rating	30W x 2	40W x 2
Frequency range	90Hz-20kHz	70Hz-20kHz
SPL(1W/1m)	89dB	91dB
Woofer and impedance	5.25"PP/8 ohms	6.5"PP/8 ohms
Tweeter and impedance	3.4" silk dome/8 ohms	1" silk dome/8 ohms
Dimensions WxDxH	248x183x164mm	300x215x189mm
Color	white (RAL9003) or black (RAL9005)	

HYB106-5AC/6AC

- **Active speaker**
- Exceptional audio performance
- Easy and flexible installation
- Designed for both residential and commercial use
- **Work with the wall controller for better audio experience**
- Suitable for classrooms/meeting rooms setting

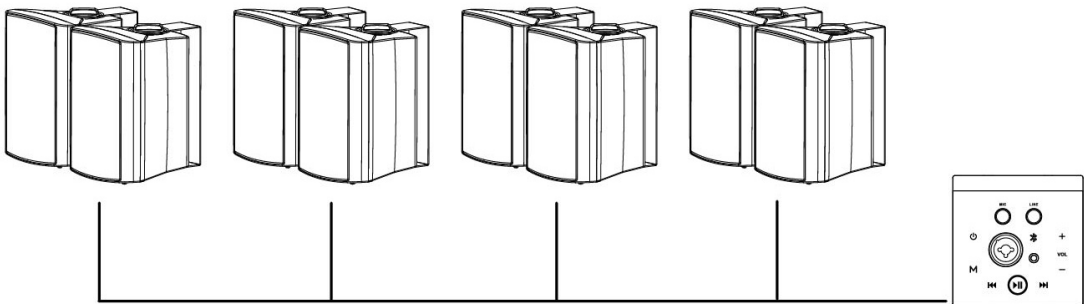

Technical data	HYB106-5AC	HYB106-6AC
Loading rating	30W x 2	40W x 2
Frequency range	90Hz-20kHz	70Hz-20kHz
SPL(1W/1m)	89dB	91dB
Woofer and impedance	5.25"PP/8 ohms	6.5"PP/8 ohms
Tweeter and impedance	3.4" silk dome/8 ohms	1" silk dome/8 ohms
Dimensions WxDxH	248x183x164mm	300x215x189mm
Color	white (RAL9003) or black (RAL9005)	

WALL MOUNT SPEAKER

HYB106-5B/6B

- **Active speaker**
- Exceptional audio performance
- Easy and flexible installation
- Designed for both residential and commercial use
- Support Bluetooth connections
- Built to **withstand water exposure**



Technical data	HYB106-5B+5	HYB106-6B+6
Loading rating	30W x 2	40W x 2
Frequency range	90Hz-20kHz	70Hz-20kHz
SPL(1W/1m)	89dB	91dB
Woofer and impedance	5.25"PP/8 ohms	6.5"PP/8 ohms
Tweeter and impedance	3.4" silk dome/8 ohms	1" silk dome/8 ohms
Dimensions WxDxH	248x183x164mm	300x215x189mm
Color	white (RAL9003) or black (RAL9005)	

HYB159

- **Passive speaker**
- Exceptional audio performance
- Modern and slim design



Technical data	HSR159
Woofer	3"
RMS power	2x6W
Frequency response	80Hz~20kHz
Sensitivity (1W/1m)	90dB
Broadcast receive sensitivity	-95dB
Power supply	100-240V AC/50-60Hz
Dimensions WxHxD	84x84x130mm

WALL MOUNT SPEAKER

HYB150 Series

- **Passive speaker**
- With transformer
- Exceptional audio performance
- Easy and flexible installation
- Designed for both residential and commercial use



Technical data	HYB150-3T	HYB150-4T	HYB150-5T
Loading rating	10W	15W	20W
Frequency range	100Hz-20kHz	90Hz-20kHz	80Hz-20kHz
SPL(1W/1m)	86dB	87dB	88dB
Woofer	3"	4"	5"
Tweeter	0.5" mylar dome	0.5" mylar dome	0.5" mylar dome
Dimensions WxDxH	107x157x100mm	125x190x115mm	139x190x115mm
Color	white (RAL9003) or black (RAL9005)		
Input	100V or 8Ω		

HYB150-A Series

- **Active speaker**
- Exceptional audio performance
- Easy and flexible installation
- Designed for both residential and commercial use



Technical data	HYB150-3A+3	HYB150-4A+4	HYB150-5A+5
Loading rating	10W x 2	15W x 2	20W x 2
Frequency range	100Hz-20kHz	90Hz-20kHz	80Hz-20kHz
SPL(1W/1m)	86dB	87dB	88dB
Woofer	3"	4"	5"
Tweeter	0.5" mylar dome	0.5" mylar dome	0.5" mylar dome
Dimensions WxDxH	107x157x100mm	125x190x115mm	139x190x115mm
Color	white (RAL9003) or black (RAL9005)		

WALL MOUNT SPEAKER

HYB158 Series

- **Passive speaker**
- With transformer
- Exceptional audio performance
- **Special bracket** made for easy and flexible installation
- Designed for both residential and commercial use
- Built to **withstand water exposure**
- Adjustable both horizontally and vertically



Technical data	HYB158-3T	HYB158-4T	HYB158-5T	HYB158-6T
RMS power handling	20W	30W	40W	60W
Impedance	8 ohms	8 ohms	8 ohms	8 ohms
Sensitivity(1W/1m)	81 dB	84 dB	87 dB	89 dB
Frequency Response	120Hz-20kHz	100Hz-20kHz	85Hz-20kHz	65Hz-20kHz
Drivers	0.5" Dome+3" Woofer	0.5" Dome+4" Woofer	0.5" Dome+5.25" Woofer	1" Dome+6.5" Woofer
Weight	0.835kg	1.246kg	1.595kg	2.355kg
Dimensions WxHxD	106x150x114mm	140x200x135mm	175x250x155.8mm	215x302.9x189.5mm
Operating Temperature	-20°C ~ 60 °C			
Color	white (RAL9003) or black (RAL9005)			

HYB158-A Series

- **Active speaker**
- Exceptional audio performance
- **Special bracket** made for easy and flexible installation
- Designed for both residential and commercial use
- Adjustable both horizontally and vertically



Technical data	HYB158-5A	HYB158-6A
RMS power handling	40W	60W
Impedance	8 ohms	8 ohms
Sensitivity(1W/1m)	87 dB	89 dB
Frequency Response	85Hz-20kHz	65Hz-20kHz
Drivers	0.5" Dome+5.25" Woofer	1" Dome+6.5" Woofer
Weight	1.595kg	2.355kg
Dimensions WxHxD	175x250x155.8mm	215x302.9x189.5mm
Operating Temperature	-20°C ~ 60 °C	
Color	white (RAL9003) or black (RAL9005)	

WALL MOUNT SPEAKER

HWR103T



- Passive speaker
- With transformer

Technical data	HWR103T
Load rating	6W
Transformer taps	6-3-1.5W (100V)
Frequency range	150-15kHz
SPL	92dB@1W/1m
Speaker and impedance	5" & 8 ohms
Dimension	194x188x87mm
Color	white (RAL9003)

HWR108T



- Passive speaker
- With transformer

Technical data	HWR108T
Load rating	10W
Transformer taps	10W (100V)
Frequency range	110-16kHz
SPL	92dB@1W/1m
Speaker and impedance	6.5" & 8 ohms
Dimension	258x185x120mm
Color	white (RAL9003)

HWR118T



- Passive speaker
- With transformer

Technical data	HWR118T
Load rating	6W
Transformer taps	6-3-1.5W
Frequency range	150-17kHz
SPL	90dB@1W/1m
Speaker and impedance	5" & 8 ohms
Dimension	296x200x84mm
Color	white (RAL9003)

HWR132-5



- Passive speaker
- With transformer

Technical data	HWR132-5
Load rating	6W
Transformer taps	6W (100V)
Frequency range	120-18kHz
SPL	92dB@1W/1m
Speaker and impedance	5" & 8 ohms
Dimension	172x172x80mm
Color	white (RAL9003)

CEILING SPEAKER

HSR122T

- Passive speaker
- With transformer

Technical data	HSR122T
Load rating	3 W
Transformer tapings at 100 V	3 W
Transformer tapings at 70 V	3-1.5 W
Transformer tapings at 50 V	3-1.5-0.75 W
Frequency range	150-15KHz
SPL(@1W/m)	85dB
Speaker unit size	3 inch
Dimension OD, Install depth(max.)	OD 102, (63)mm
Material , Color	Steel , white



HSR162T

- Passive speaker
- With transformer

Technical data	HSR162T
Load rating	6 W
Transformer tapings at 100 V	6 W
Transformer tapings at 70 V	6-3W
Transformer tapings at 50 V	6-3-1.5W
Frequency range	150-15KHz
SPL(@1W/m)	85dB
Speaker Ø and Impedance	3" /8 ohms
Dimension Ø,Install depth(max.)	Ø100(72)mm
Material , Color	ABS , white



HSR164-3T

- Passive speaker
- With transformer
- Withstand water exposure, suitable for moisture environment (e.g. bathrooms, sauna rooms)

Technical data	HSR164-3T
Load rating	6/10/15W
Transformer taps	6-3/10-5/15-7.5W
Frequency range	90-16/130-15/10-15kHz
SPL(@1W/m)	89/92/93dB(1W/1m)
Speaker and impedance	5"/6.5"/8" and 8 ohms
Tweeter	0.5" mylar
Dimention, install length	173,41/186,55/224,76mm
Color	white (RAL9003)



CEILING SPEAKER

HSR109-5T/6T/8T

- Passive speaker
- With transformer

Technical data	HSR109-5T/6T/8T
Load rating	6/10/15W
Transformer taps	6-3/10-5/15-7.5W
Frequency range	90-16/130-15/10-15kHz
SPL(@1W/m)	89/92/93dB(1W/1m)
Speaker and impedance	5"/6.5"/8" and 8 ohms
Dimention, install length	173,41/186,55/224,76mm
Color	white (RAL9003)



HSR181 Series

HSR181-6T/8T

- Passive speaker
- With transformer

HSR181-6B/8B

- Active speaker
- Support Bluetooth

Technical data	HSR181-6T/8T
Load rating	6/10/15W
Transformer taps	6-3/10-5/15-7.5W
Frequency range	90-16/130-15/10-15kHz
SPL(@1W/m)	89/92/93dB(1W/1m)
Speaker and impedance	5"/6.5"/8" and 8 ohms
Dimention, install length	173,41/186,55/224,76mm
Color	white (RAL9003)



HSR182 Series

HSR182-5T/6T/8T

- Passive speaker
- With transformer

HSR182-5B/6B/8B

- Active speaker
- Support Bluetooth

Technical data	HSR182-5T/6T/8T
Load rating	20/30/40W
Transformer taps	20-10-5W/30-15-7.5W/40-20-10W
Frequency range	100-20/70-20/50-20kHz
SPL(@1W/m)	88/90/92dB(1W/1m)
Speaker and impedance	5.25"/6.5"/8" and 8 ohms
Tweeter	0.5" mylar
Dimention, install length	202,68/238,73/272,93mm
Install dimension	166/202/240mm



CEILING SPEAKER

HSR186 Series

HSR186-5C/6C/8C

- Passive speaker
- With crossover

HSR186-5T/6T/8T

- Passive speaker
- With transformer


HSR186-5B/6B/8B

- Active speaker
- Support Bluetooth



Technical data	HSR186-5T/6T/8T(C)
Load rating	20/30/40W
Transformer taps	20-10-5W/30-15-7.5W/40-20-10W
Frequency range	70-20/50-20/40-20kHz
SPL(@1W/m)	88/90/92dB(1W/1m)
Speaker and impedance	5.25"/6.5"/8" and 8 ohms
Tweeter	0.5" mylar
Dimention, install length	186,74/215,80/254,87mm
Install dimension	161/190/229mm

Technical data	HSR186-5B/6B/8B
Load rating	20/30/40W
Frequency range	100-20/70-20/50-20kHz
SPL(@1W/m)	88/90/92dB(1W/1m)
Speaker and impedance	5.25"/6.5"/8" and 8 ohms
Tweeter	0.5" mylar
Dimention, install length	186,74/215,80/254,87mm
Install dimension	161/190/229mm



- Rectangle aluminum grille is available for HSR186 Series.

HSR187-6T

- Passive speaker with transformer
- Exceptional audio performance
- Easy-to-mount one piece construction
- With metal backbox

Technical data	HSR187-6T
Power rating	80W(continuous), 32W RMS
Transformer taps	32-16-8W(100V), 32-16-8-4W(70V)
Frequency range	75-20kHz
SPL(@1W/m)	85 dB (1W/1m)
Speaker and impedance	6.5" and 8 ohms
Tweeter	1" silk
Dimention	253x212mm



- Optional C-Mounting bracket and 2 tile support rails for the speaker installation

HANGING AND PROJECTOR SPEAKER

HSR312-5T/6T

- **Passive speaker**
- With transformer
- Exceptional audio performance
- Designed for both residential and commercial use



Technical data	HSR312-5T	HSR312-6T
Load rating	10W	20W
Transformer taps	10-5-2.5W	20-10-5W
Frequency range	130-17kHz	100-17kHz
SPL	90dB@1W/1m	92dB@1W/1m
Speaker and impedance	5" & 8 ohms	6.5" & 8 ohms
Dimension	138x200mm	170x252mm
Color	white (RAL9003)	white (RAL9003)

HSR316-5T/6T

- **Passive speaker**
- With transformer
- Exceptional audio performance
- Designed for both residential and commercial use



Technical data	HSR316-5T	HSR316-6T
Load rating	30W	40W
Transformer taps	30-15-7.5-3.8W	40-20-10-5W
Frequency range	70-20kHz	70-20kHz
SPL	89dB@1W/1m	90dB@1W/1m
Speaker	5.25"/2-way	6.5"/2-way
Tweeter	1" silk	1" silk
Dimension, install depth	220x220mm	252x240mm
Color	white (RAL9003) or black (RAL9005)	white (RAL9003) or black (RAL9005)

HORN SPEAKER

HAW820/1220

- **Highly weather-resistant**
- Consistent broadband pattern control
- Exceptional audio performance
- Ideal for speech and music in a wide variety of applications, including sports facilities, stadiums, outdoor background music/paging systems, and a wide variety of other outdoor or indoor venue types.



Technical data	HAW820	HAW1220
Load rating power	250W	400W
Impedance	8 ohms	8 ohms
Sensitivity	94dB(1W/1m)	96dB(1W/1m)
Frequency range	80Hz-20kHz	55Hz-20kHz
Transformer taps	70V: 200W, 100W, 50W, 25W 100V: 200W, 100W, 50W	70V: 200W, 100W, 50W, 25W 100V: 200W, 100W, 50W
Coverage pattern	120° x 120°	90° x 90°
Dimention (cabinet)	300 x 300 x 305 mm	402 x 402 x 445 mm
Accessories	U-bracket	U-bracket

SC-30



Technical data	SC-30
Load rating power	30W
Input impedance	330-670-1k-2k-3.3k-10k ohms
Frequency response	350Hz-5kHz
SPL	108dB@1W/m
Output power	30-15-10W
Dimension	205x283x256mm

SC-75



Technical data	SC-75
Load rating power	75W
Nominal impedance	16 ohms
Frequency response	250Hz-6kHz
SPL	109dB@1W/m
Input method	100V
Transformer tapping	75-50-30W@100V
Protection Level	390x310x425mm

HORN SPEAKER

H6300

- **Highly weather-resistant**
- Consistent broadband pattern control
- Exceptional audio performance
- Ideal for speech and music in a wide variety of applications, including sports facilities, stadiums, outdoor background music/paging systems, and a wide variety of other outdoor or indoor venue types.



Technical data	H6300
Load rating	50/25/12.5W-100V
Impedance	200/400/800 ohms
Sensitivity	97dB(1W/1m)
Frequency range	200Hz-20kHz
Power selection	Terminal block
Ingress protected	IEC529 IP66
LF driver materials	6.5" cone speaker
HF driver ,aterials	1" dome tweeter
Exterior dimension	370x270x305mm

H6400


- **Highly weather-resistant**
- Consistent broadband pattern control
- Exceptional audio performance
- Ideal for speech and music in a wide variety of applications, including sports facilities, stadiums, outdoor background music/paging systems, and a wide variety of other outdoor or indoor venue types.



Technical data	H6400
Load rating	50/25/12.5W-100V
Impedance	200/400/800 ohms
Sensitivity	97dB(1W/1m)
Frequency range	200Hz-20kHz
Power selection	Switch
Ingress protected	IEC529 IP66
LF driver materials	6.5" cone speaker
HF driver ,aterials	1" dome tweeter
Exterior dimension	390x310x425mm

VOLUME CONTROL (8Ω)

HVC1201S

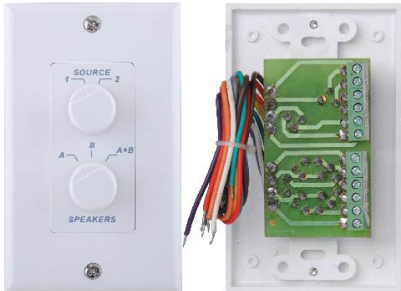

- In-wall volume control
- 8Ω

Technical data	HVC1201S
Input source	2
Channel quantity	2
Speaker distributor	A, B, A+B
Install depth	20mm
Dimension WxHxD	70x112x46mm
Color	white (RAL9003)

HVC1202S



- In-wall volume control
- 8Ω

Technical data	HVC1202S
Input source	1
Channel quantity	2
Speaker distributor	A, B, A+B
Install depth	60mm
Dimension WxHxD	70x112x75mm
Color	white (RAL9003)

HVC5004



- In-wall volume control
- 8Ω

Technical data	HVC5004
Rated power	50W
Channel quantity	2
Switch type	Slides switch (12 steps)
Install depth	82mm
Dimension WxHxD	70x112x101mm
Color	white (RAL9003)

HVC7504



- In-wall volume control
- 8Ω

Technical data	HVC7504
Rated power	50W
Channel quantity	2
Switch type	Rotary switch (12 steps)
Install depth	62mm
Dimension WxHxD	70x112x83mm
Color	white (RAL9003)

VOLUME CONTROL (70/100V)

HVC7035/7050/70100/70200


- In-wall volume control
- 70/100V



Technical data	HVC7035	HVC7050	HVC70100	HVC70200
Rated power	35W	50W	100W	200W
Channel quantity	1	1	1	1
Switch type	Rotary switch (11 steps)	Rotary switch (11 steps)	Rotary switch (11 steps)	Rotary switch (11 steps)
Install depth	47mm	47mm	47mm	47mm
Dimension WxHxD	70x120x80mm	70x120x80mm	70x120x80mm	70x120x80mm
Color	white (RAL9003)	white (RAL9003)	white (RAL9003)	white (RAL9003)

HVC7035M/7050M/70100M/70200M

- In-wall volume control
- 70/100V

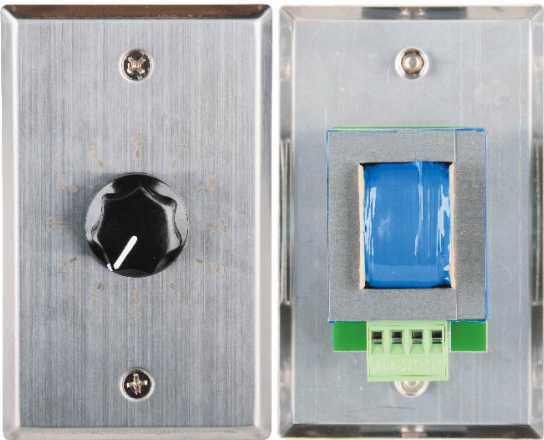


Technical data	HVC7035M	HVC7050M	HVC70100M	HVC70200M
Rated power	35W	50W	100W	200W
Channel quantity	1	1	1	1
Switch type	Rotary switch (11 steps)	Rotary switch (11 steps)	Rotary switch (11 steps)	Rotary switch (11 steps)
Install depth	47mm	47mm	47mm	47mm
Dimension WxHxD	70x120x80mm	70x120x80mm	70x120x80mm	70x120x80mm
Color	Stainless steel	Stainless steel	Stainless steel	Stainless steel

VOLUME CONTROL (70/100V)

HVC86N-6/10/30/50

- In-wall volume control
- 70/100V

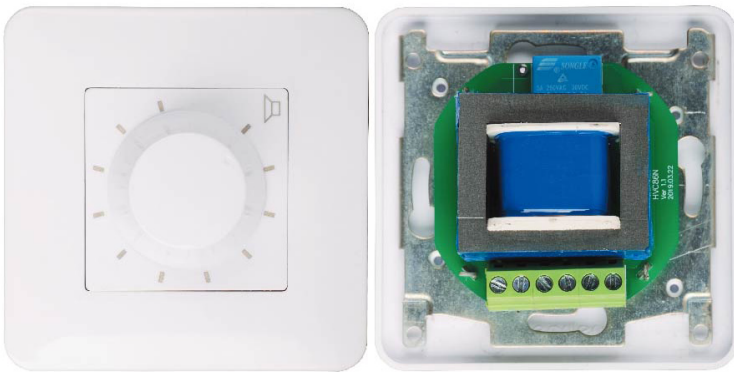

Technical data	HVC86N-6	HVC86N-10	HVC86N-30	HVC86N-50
Rated power	6W	12W	30W	50W
Channel quantity	1	1	1	1
Switch type	Rotary switch (11 steps)	Rotary switch (11 steps)	Rotary switch (11 steps)	Rotary switch (11 steps)
Install depth	42.5mm	42.5mm	42.5mm	42.5mm
Dimension WxHxD	86x86x66mm	86x86x66mm	86x86x66mm	86x86x66mm
Color	white (RAL9003)	white (RAL9003)	white (RAL9003)	white (RAL9003)

HVC86A-6/10/30/50

- In-wall volume control
- 70/100V



Technical data	HVC86A-6	HVC86A-10	HVC86A-30	HVC86A-50
Rated power	6W	12W	30W	50W
Channel quantity	1	1	1	1
Switch type	Rotary switch	Rotary switch	Rotary switch	Rotary switch
Install depth	42.5mm	42.5mm	42.5mm	42.5mm
Dimension WxHxD	86x86x66mm	86x86x66mm	86x86x66mm	86x86x66mm
Color	silver and gold	silver and gold	silver and gold	silver and gold

SELECTOR

HVC412/612

- 4-zone/6-zone dual source volume controller and speaker distributor
- Heavy duty transformer based impedance system
- Isolated left and right channels for safe operation with any amplifier
- Connection to two separate amplifiers via A/B switch



Technical data	HVC412	HVC612
Music power	600W	900W
RMS power	200W	300W
Dimensions WxDxH	288x152x56mm	432x152x56mm

HVS401/601/801

- Multiple speaker outputs (4/6/8)
- Speaker pair selection



Technical data	HVS401	HVS601	HVS801
Music power	600W	900W	1200W
RMS power	200W	300W	400W
Dimensions WxDxH	216x130x58mm	286x130x58mm	433x130x58mm

